

JUNG PUMPEN COMPLI

RESIDENTIAL TECHNOLOGY

SEWAGE LIFTING STATIONS









COMPLI SEWAGE LIFTING STATIONS

READY TO PLUG-IN ▪ POWERFUL

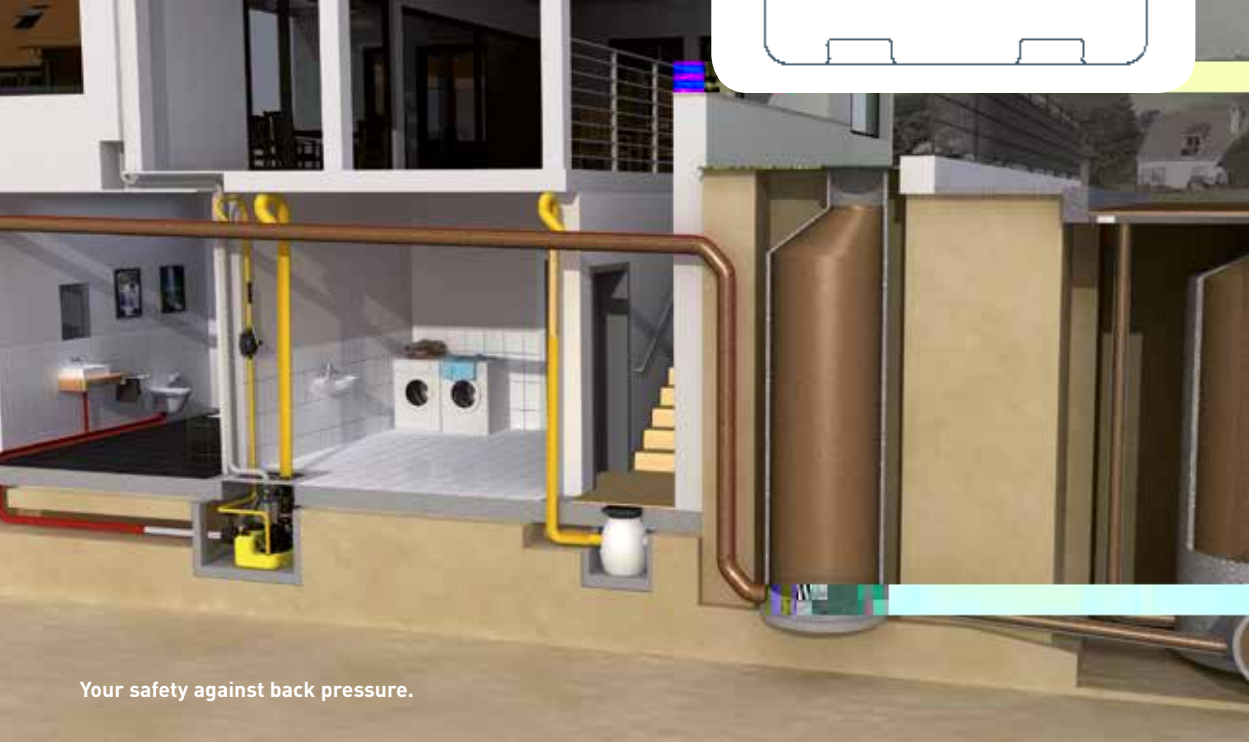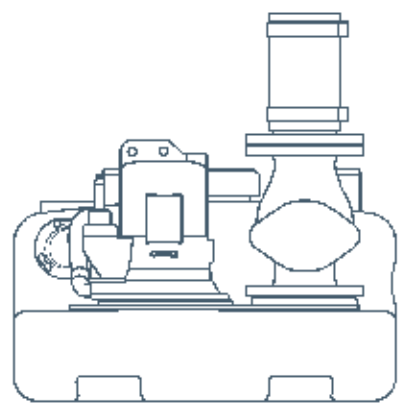

NUMBERS - DATES - FACTS

| compli | Dimensions h x w x d [mm] | Tank capacity [l] | Hmax [m] | Qmax [m³/h] | Free passage [mm] | Inlet height [mm] |
|-----------------------|------------------------------|----------------------|-------------|----------------|----------------------|----------------------|
| Single units | | | | | | |
| 300 E | 445 x 525 x 525 | 50 | 10,5 | 29 | 50 | 180 |
| 400 | 445 x 650 x 595 | 64 | 7 | 48 | 70 | 180/250 |
| 500 | 600 x 835 x 690 | 115 | 20 | 76 | 70 | variable |
| 100 MultiCut | 450 x 500 x 636 | 38 | 24 | 18 | 7 | 180/250 |
| 500 MultiCut | 600 x 835 x 690 | 115 | 24 | 18 | 7 | variable |
| Duplex units | | | | | | |
| 1000 | 600 x 835 x 690 | 115 | 20 | 76 | 70 | variable |
| 1200 | 800 x 910 x 1010 | 350 | 20 | 76 | 70 | 560-700 |
| 1500 | 820 x 910 x 1610 | 500 | 22 | 100 | 70 / 100 | 700 |
| 2500 | 820 x 1955 x 1610 | 2 x 500 | 22 | 100 | 70 / 100 | 700 |
| 1000 MultiCut | 600 x 835 x 690 | 115 | 24 | 18 | 7 | variable |
| Stainless steel units | | | | | | |
| 1200 Stainless steel | 880 x 770 x 1142 | 270 | 16 | 122 | 80 / 100 | 700 |
| 1400 Stainless steel | 985 x 970 x 1375 | 540 | 16 | 122 | 80 / 100 | 800 |
| 1600 Stainless steel | 985 x 970 x 1882 | 900 | 16 | 122 | 80 / 100 | 800 |



Height adjustable clamping flange
compl i 400



COMPLI SEWAGE LIFTING STATIONS -

C ETab by ta 110 the s Tf 0.025 Tw 110 Amping f in. 0226



PVC inlet sluice valve
DN 100 or DN 150, with pipe sockets
bonded in, for the time-saving and
space-saving direct connection to the
inlet clamping flange.

